



防水防尘-鼓风机

75x75x30mm

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD


3. 调速方式 (Speed control mode)

PWM




风扇单重: 85g (weight: 85g)

风扇P-Q曲线 / Fan performance curve

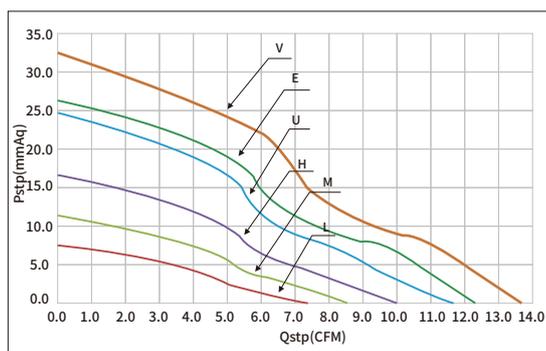

尺寸图 / DIMENSIONS DRAWING

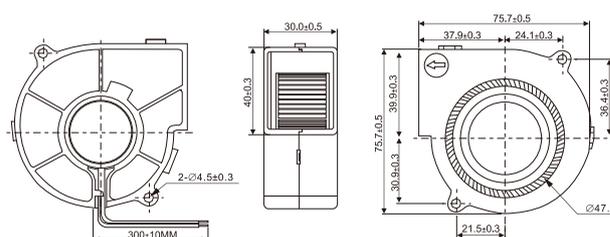

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise
型号		轴承	工作电压	启动电压	电流	功率	转速	风量		风压		噪音
Part NO.	Function	System	VDC	VDC	A	W	RPM	M ³ /min	CFM	mmH ₂ O	INH ₂ O	dBA
HBB7512VY	IP 68	Ball	12	5.0	0.43	5.16	5000	0.39	13.68	32.53	1.28	50.0
HBB7512EY	IP 68			5.0	0.36	4.32	4500	0.35	12.31	26.35	1.04	47.7
HBB7512UY	IP 68			5.0	0.24	2.88	4200	0.33	11.74	24.74	0.97	45.3
HBB7512HY	IP 68			5.0	0.18	2.16	3500	0.29	10.08	16.66	0.66	40.6
HBB7512MY	IP 68			5.0	0.15	1.80	3000	0.24	8.62	11.41	0.45	37.0
HBB7512LY	IP 68			5.0	0.12	1.44	2500	0.21	7.37	7.54	0.30	33.3
HBB7524EY	IP 68	Ball	24	12.0	0.38	9.12	4500	0.35	12.31	26.35	1.04	47.7
HBB7524UY	IP 68			12.0	0.27	6.48	4200	0.33	11.74	24.74	0.97	45.3
HBB7524HY	IP 68			12.0	0.20	4.80	3500	0.29	10.08	16.66	0.66	40.6
HBB7524MY	IP 68			12.0	0.12	2.88	3000	0.24	8.62	11.41	0.45	37.0
HBB7524LY	IP 68			12.0	0.10	2.40	2500	0.21	7.37	7.54	0.30	33.3