



## DC-鼓风机风扇 93x93x30mm

### 马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)

PWM

TC




风扇单重:113g (weight:113g)




DC BLOWER FAN  
鼓风机风扇

风扇P-Q曲线 / Fan performance curve

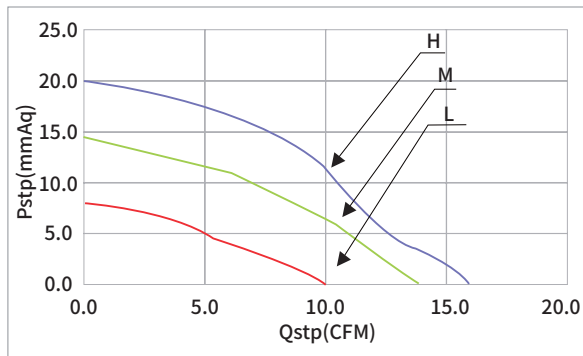

尺寸图 / DIMENSIONS DRAWING

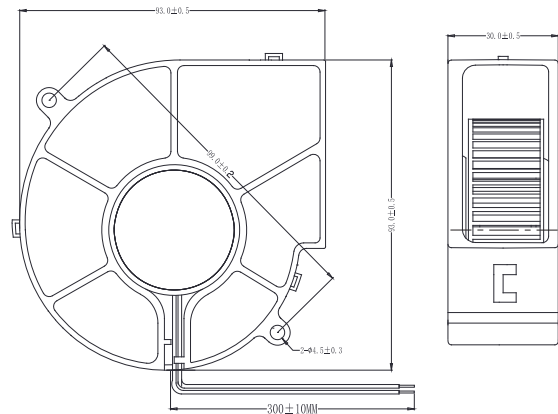

| Model     | Bearing  | Rated Voltage | Startup Voltage | Current | Power | Speed | Air Flow | Static Pressure     | Noise |                    |                    |      |
|-----------|----------|---------------|-----------------|---------|-------|-------|----------|---------------------|-------|--------------------|--------------------|------|
| 型号        | 轴承       | 工作电压          | 启动电压            | 电流      | 功率    | 转速    | 风量       | 风压                  | 噪音    |                    |                    |      |
| Part NO.  | Function | System        | VDC             | VDC     | A     | W     | RPM      | M <sup>3</sup> /min | CFM   | mmH <sub>2</sub> O | INH <sub>2</sub> O | dBA  |
| HBB9312HZ | -A       | Sleeve        | 12              | 5.0     | 0.45  | 5.40  | 3000     | 0.46                | 16.22 | 20.37              | 0.80               | 42.2 |
| HBB9312MZ | -A       |               |                 | 5.0     | 0.30  | 3.60  | 2500     | 0.40                | 14.24 | 14.67              | 0.58               | 40.4 |
| HBB9312LZ | -A       |               |                 | 5.0     | 0.20  | 2.40  | 2000     | 0.29                | 10.34 | 7.88               | 0.31               | 35.7 |
| HBB9312HZ | -A       | Ball          |                 | 5.0     | 0.45  | 5.40  | 3000     | 0.46                | 16.22 | 20.37              | 0.80               | 42.2 |
| HBB9312MZ | -A       |               |                 | 5.0     | 0.30  | 3.60  | 2500     | 0.40                | 14.24 | 14.67              | 0.58               | 40.4 |
| HBB9312LZ | -A       |               |                 | 5.0     | 0.20  | 2.40  | 2000     | 0.29                | 10.34 | 7.88               | 0.31               | 35.7 |
| HBS9324HZ | -A       | Sleeve        | 24              | 12.0    | 0.35  | 8.40  | 3000     | 0.46                | 16.22 | 20.37              | 0.80               | 42.2 |
| HBS9324MZ | -A       |               |                 | 12.0    | 0.15  | 3.60  | 2500     | 0.40                | 14.24 | 14.67              | 0.58               | 40.4 |
| HBS9924LZ | -A       |               |                 | 12.0    | 0.10  | 2.40  | 2000     | 0.29                | 10.34 | 7.88               | 0.31               | 35.7 |
| HBB9324HZ | -A       | Ball          |                 | 12.0    | 0.35  | 8.40  | 3000     | 0.46                | 16.22 | 20.37              | 0.80               | 42.2 |
| HBB9324MZ | -A       |               |                 | 12.0    | 0.15  | 3.60  | 2500     | 0.40                | 14.24 | 14.67              | 0.58               | 40.4 |
| HBB9924LZ | -A       |               |                 | 12.0    | 0.10  | 2.40  | 2000     | 0.29                | 10.34 | 7.88               | 0.31               | 35.7 |

■ 提示1: 目录首页有功能的详细信息。 Notes1: The catalog have detail information in the front page for the functions.

■ 提示2: 如果您需要列表中的其他转速或电压或功能, 请与我们的业务联系。 Notes2: If you need other speed or voltage or function in the list, please contact our business.