



DC-直流轴流风扇 40x40x20mm-3

马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)


FG

RD


3. 调速方式 (Speed control mode)

PWM


TC

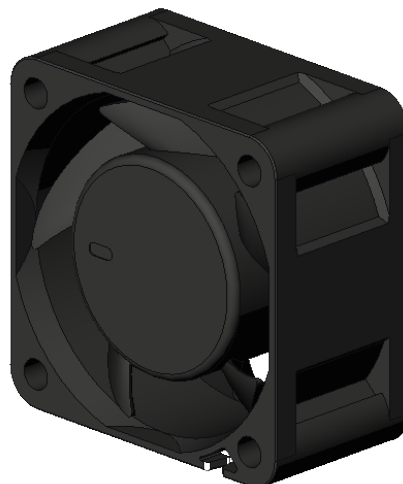

风扇P-Q曲线 / Fan performance curve

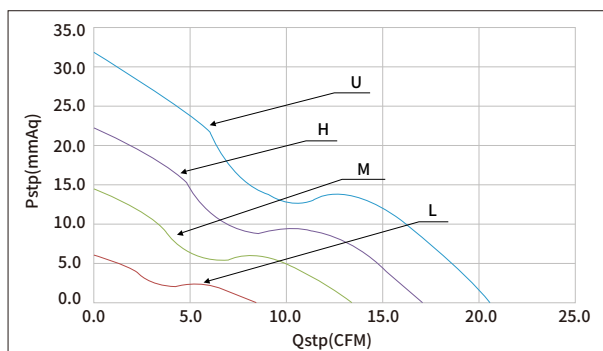

尺寸图 / DIMENSIONS DRAWING

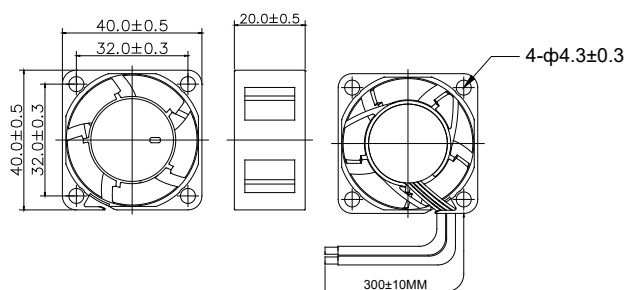

Model		Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow		Static Pressure		Noise
型号	功能	系统	VDC	VDC	A	W	RPM	M³/min	CFM	mmH₂O	IN H₂O	噪音
Part NO.	Function	System	VDC	VDC	A	W	RPM	M³/min	CFM	mmH₂O	IN H₂O	dBA
HDB0412UC-3		Ball	12	7.0	0.45	5.40	17000	0.58	20.63	31.80	1.24	52.5
HDB0412HC-3				7.0	0.30	3.60	14000	0.48	17.10	22.30	0.87	46.5
HDB0412MC-3				7.0	0.19	2.28	11000	0.38	13.40	14.40	0.56	39.4
HDB0412LC-3				7.0	0.08	0.96	7000	0.24	8.40	6.00	0.23	29.4
HDB0424UC-3		Ball	24	12.0	0.23	5.52	17000	0.58	20.63	31.80	1.24	52.5
HDB0424HC-3				12.0	0.15	3.60	14000	0.48	17.10	22.30	0.87	46.5
HDB0424MC-3				12.0	0.10	2.40	11000	0.38	13.40	14.40	0.56	39.4
HDB0424LC-3				12.0	0.04	0.96	7000	0.24	8.40	6.00	0.23	29.4