



## DC-直流轴流风扇 50x50x25mm

### 马达可选功能列表 (Available Functions)

1. 马达保护 (Moto protection)

AS

2. 信号输出 (Signal out put)

FG

RD

3. 调速方式 (Speed control mode)

PWM


TC




风扇单重: 30g (weight: 30g)



### 风扇P-Q曲线 / Fan performance curve

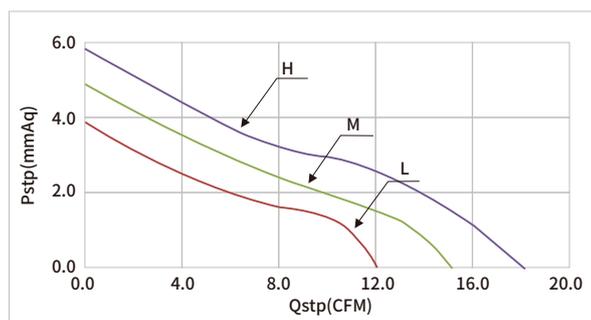

### 尺寸图 / DIMENSIONS DRAWING

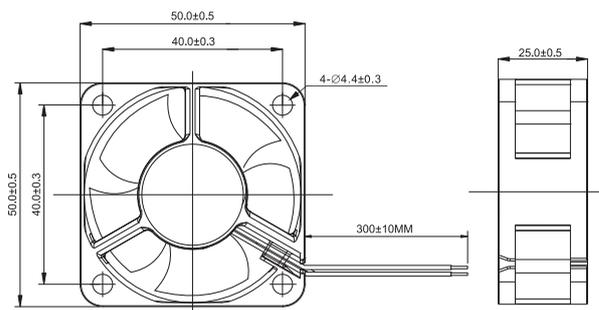

Model	Bearing	Rated Voltage	Startup Voltage	Current	Power	Speed	Air Flow	Static Pressure	Noise		
型号	轴承	额定电压	启动电压	电流	功率	转速	风量	风压	噪音		
Part NO.	Function	System	VDC	VDC	A	W	M <sup>3</sup> /min	CFM	mmH <sub>2</sub> O	INH <sub>2</sub> O	dBA
HDS0512HA	Sleeve	12	7.0	0.22	2.64	6000	0.51	18.12	5.85	0.23	36.0
HDS0512MA			7.0	0.16	1.92	5000	0.43	15.22	4.90	0.19	29.8
HDS0512LA			7.0	0.12	1.44	4000	0.34	12.13	3.91	0.15	24.1
HDB0512HA			7.0	0.22	2.64	6000	0.51	18.12	5.85	0.23	36.0
HDB0512MA	Ball	12	7.0	0.16	1.92	5000	0.43	15.22	4.90	0.19	29.8
HDB0512LA			7.0	0.12	1.44	4000	0.34	12.13	3.91	0.15	24.1
HDS0524HA	Sleeve	24	12.0	0.17	4.08	6000	0.51	18.12	5.85	0.23	36.0
HDS0524MA			12.0	0.11	2.64	5000	0.43	15.22	4.90	0.19	29.8
HDS0524LA			12.0	0.09	2.16	4000	0.34	12.13	3.91	0.15	24.1
HDB0524HA			12.0	0.17	4.08	6000	0.51	18.12	5.85	0.23	36.0
HDB0524MA	Ball	24	12.0	0.11	2.64	5000	0.43	15.22	4.90	0.19	29.8
HDB0524LA			12.0	0.09	2.16	4000	0.34	12.13	3.91	0.15	24.1