



# DC AXIAL FAN



## DC-直流轴流风扇 50x50x10mm

### 马达可选功能列表 (Available Functions)

#### 1. 马达保护 (Moto protection)

AS

#### 2. 信号输出 (Signal out put)

FG

RD

#### 3. 调速方式 (Speed control mode)

PWM


TC




风扇单重:15g (weight:15g)



### 风扇P-Q曲线 / Fan performance curve

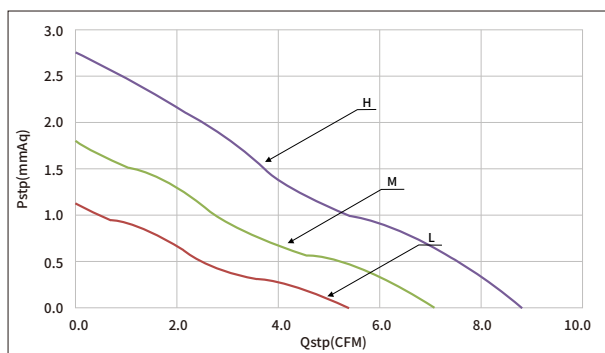

### 尺寸图 / DIMENSIONS DRAWING

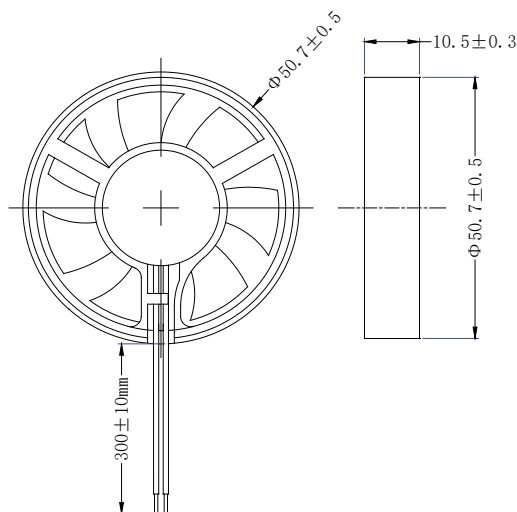

| Model     |          | Bearing   | Rated Voltage | Startup Voltage | Current | Power | Speed | Air Flow |      | Static Pressure |       | Noise |
|-----------|----------|-----------|---------------|-----------------|---------|-------|-------|----------|------|-----------------|-------|-------|
| 型号        |          | 轴承        | 额定电压          | 启动电压            | 电流      | 功率    | 转速    | 风量       |      | 风压              |       | 噪音    |
| Part NO.  | Function | System    | VDC           | VDC             | A       | W     | RPM   | M³/min   | CFM  | mmH₂O           | INH₂O | dBA   |
| HDH0505HG |          | Hydraulic | 5             | 4.0             | 0.22    | 1.10  | 5000  | 0.25     | 8.79 | 2.68            | 0.11  | 26.1  |
| HDH0505MG |          |           |               | 4.0             | 0.20    | 1.00  | 4000  | 0.20     | 7.01 | 1.79            | 0.07  | 22.6  |
| HDH0505LG |          |           |               | 4.5             | 0.16    | 0.80  | 3000  | 0.15     | 5.36 | 1.12            | 0.04  | 17.7  |
| HDB0505HG |          | Ball      |               | 4.0             | 0.22    | 1.10  | 5000  | 0.25     | 8.79 | 2.68            | 0.11  | 26.1  |
| HDB0505MG |          |           |               | 4.0             | 0.20    | 1.00  | 4000  | 0.20     | 7.01 | 1.79            | 0.07  | 22.6  |
| HDB0505LG |          |           |               | 4.5             | 0.16    | 0.80  | 3000  | 0.15     | 5.36 | 1.12            | 0.04  | 17.7  |
| HDH0512HG |          | Hydraulic | 12            | 9.0             | 0.15    | 1.80  | 5000  | 0.25     | 8.79 | 2.68            | 0.11  | 26.1  |
| HDH0512MG |          |           |               | 9.0             | 0.10    | 1.20  | 4000  | 0.20     | 7.01 | 1.79            | 0.07  | 22.6  |
| HDH0512LG |          |           |               | 9.0             | 0.08    | 0.96  | 3000  | 0.15     | 5.36 | 1.12            | 0.04  | 17.7  |
| HDB0512HG |          | Ball      |               | 9.0             | 0.15    | 1.80  | 5000  | 0.25     | 8.79 | 2.68            | 0.11  | 26.1  |
| HDB0512MG |          |           |               | 9.0             | 0.10    | 1.20  | 4000  | 0.20     | 7.01 | 1.79            | 0.07  | 22.6  |
| HDB0512LG |          |           |               | 9.0             | 0.08    | 0.96  | 3000  | 0.15     | 5.36 | 1.12            | 0.04  | 17.7  |
| HDH0524HG |          | Hydraulic | 24            | 12.0            | 0.10    | 2.40  | 5000  | 0.25     | 8.79 | 2.68            | 0.11  | 26.1  |
| HDH0524MG |          |           |               | 12.0            | 0.09    | 2.16  | 4000  | 0.20     | 7.01 | 1.79            | 0.07  | 22.6  |
| HDH0524LG |          |           |               | 12.0            | 0.06    | 1.44  | 3000  | 0.15     | 5.36 | 1.12            | 0.04  | 17.7  |
| HDB0524HG |          | Ball      |               | 12.0            | 0.10    | 2.40  | 5000  | 0.25     | 8.79 | 2.68            | 0.11  | 26.1  |
| HDB0524MG |          |           |               | 12.0            | 0.09    | 2.16  | 4000  | 0.20     | 7.01 | 1.79            | 0.07  | 22.6  |
| HDB0524LG |          |           |               | 12.0            | 0.06    | 1.44  | 3000  | 0.15     | 5.36 | 1.12            | 0.04  | 17.7  |